


Electric Bolt with Cylinder

Parameters



Lock Body	260/270Lx30Wx48H(mm) 260/270Lx30Wx73H(mm)
Magnetic Plate	100Lx25Wx3H(mm)
Bolt	16(prolongation)*16(diameter)(mm)
Signal Output	Lock signal(NO/NC/COM)
Time Delay	0/3/6/9 sec
Voltage	12VDC
Current	Start 1200mA, Standby 200mA
Feature	Fail safe(NC)/Fail secure(NO)
LED	Light on indicates locked, light off indicates unlocked
Detection Distance	Within 8mm
Suitable for	Wooden door, metal door, fireproof door, glass door
Material	304 stainless steel, wire draw finishing
Weight	1.6kg&1.8kg

Dimensions


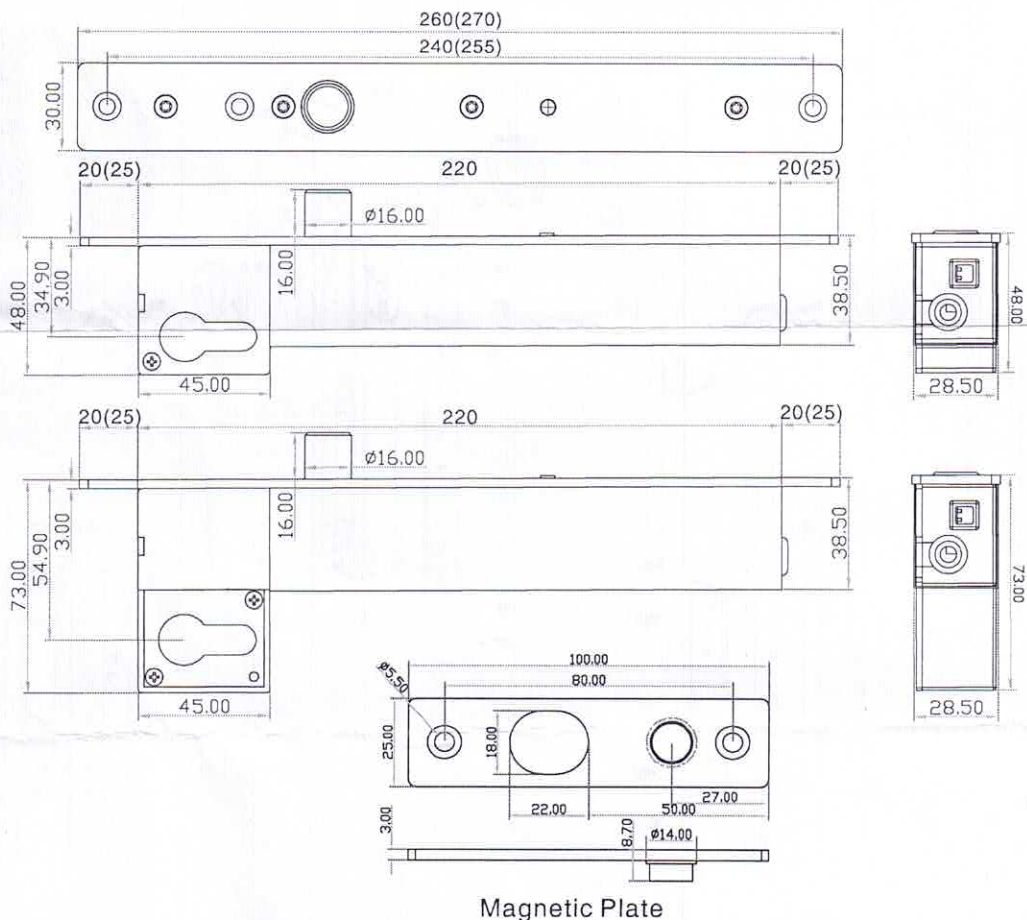


Optional Accessory



Single side cylinder or both side cylinder, other sizes are available too: 80/90/100/110/120mm.



Single side cylinder




Double side cylinder

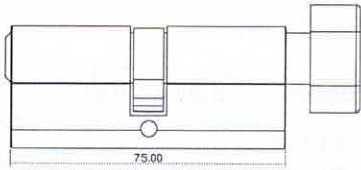




Single side cylinder with Thumb

Wiring Diagram

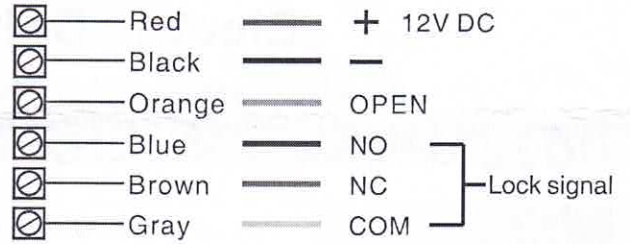

Time Delay

Adjust the delay time for locking automatically
0/3/6/9 secs.



Installation

